

TERMORTAR



termite proof mortar system

ABN 58 111 294 814 – Patent Pending

Termortar is a tested and approved termite proof mortar system to be installed in the external perimeter bottom course/s of brickwork. It is important that the Termortar be installed in the brick course to a level of 75mm minimum above the finished ground level and not be covered over by landscaping. Ensure that there are no holes or voids left in the Termortar.



First course of brickwork laid with Termortar

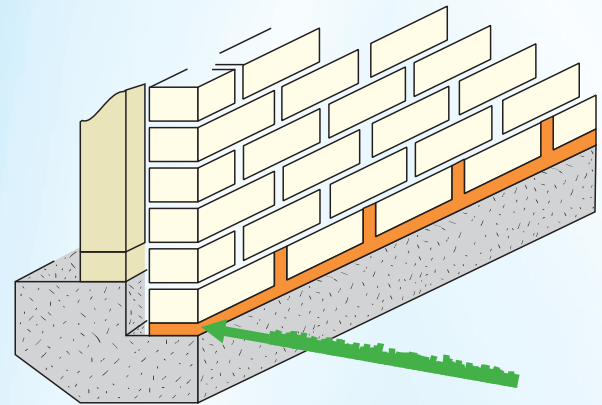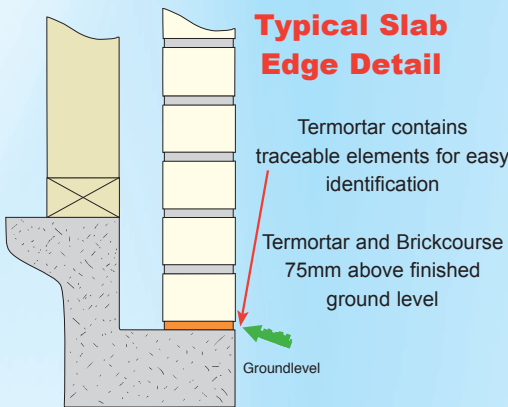


Note: Bricklayer must iron or strike all bottom bedding and perps



3D Corner Detail

Installation to be a Minimum of 75mm above finished ground level


Termortar Pipe Collar for use in concrete slabs

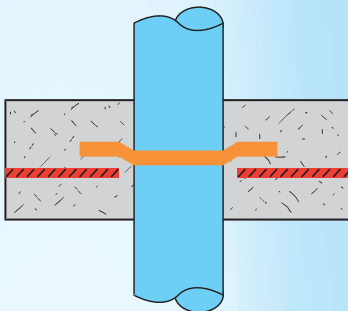

Termortar Pipe Collar for use on concrete slabs

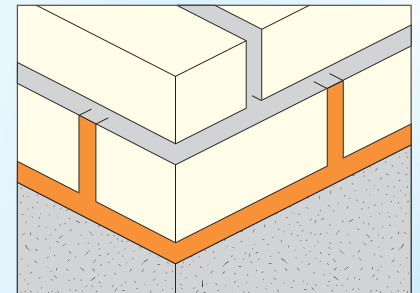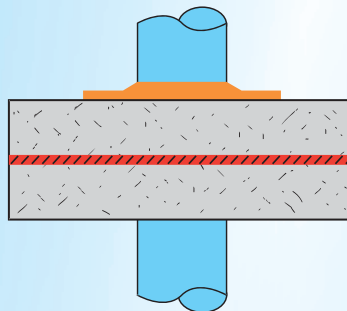

Termortar is installed by qualified bricklayers whereby no down time waiting for others to install the termite barrier. The termortar pipe penetration collars will be installed by a qualified pest manager whereby the relevant certification and inspections can be carried out as well as annual inspections

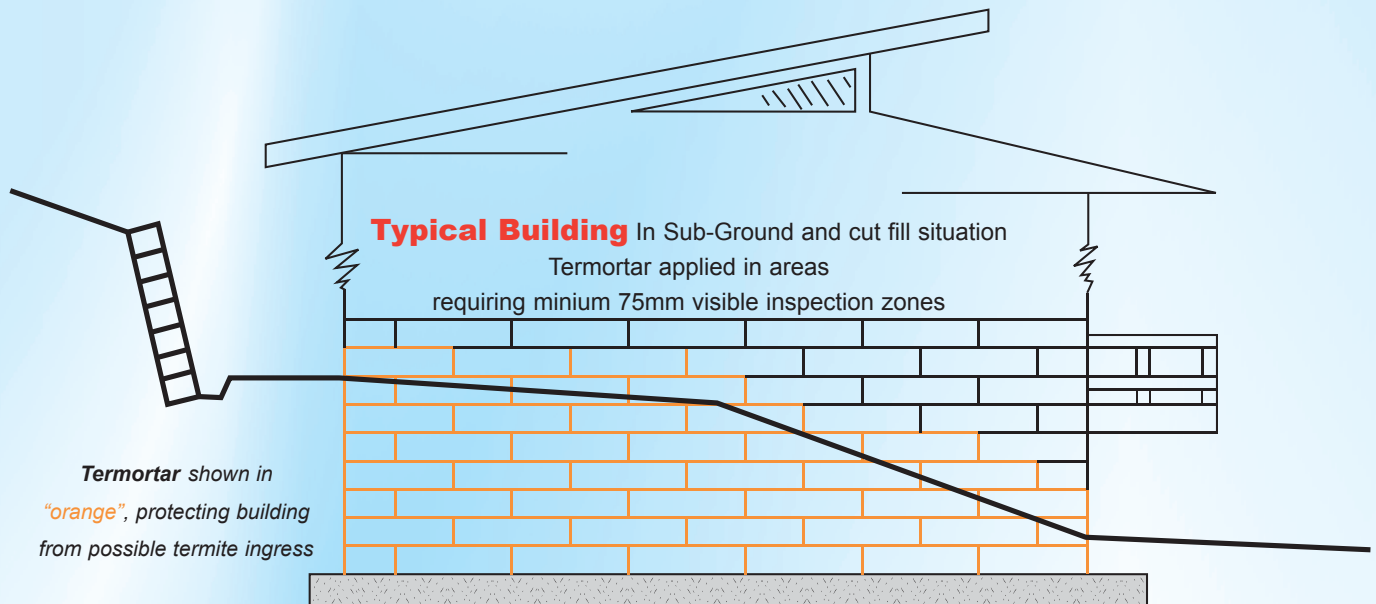

FEATURES OF TERMORTAR

- No need for separate barriers or systems using poisons
- Easy to install by qualified / licensed bricklayers
- Complies with AS 3660.1 & 3 – 2000 (Termite Code), AS 3700 (Masonry Code)
- CSIRO Building Products and Systems Appraisal Technical Assessment Number 316
- Installed in bottom brick course for concrete slabs on ground
- 50 year minimum life expectancy (ABSAC)
- Termortar is identified by traceable elements as well as its formulated composition
- Can be used in engaged piers, filling in extruded brick holes
- All bedding and perps must be ironed or struck
- Termortar is "Non-Toxic" as well as no maintenance
- Coloured oxides can be mixed into Termortar - base colours are "off white" and "grey"
- Landscape areas and retaining walls can also be protected with Termortar as an Approved termite proof render
- Sliding door sill areas easily termite proofed
- Post construction quality assurance system
- No holes or voids are to be left in the bottom course of Termortar brickwork
- MSDS and OH&S information is on the 20Kg bag
- Installation and product insurance
- Suitable as construction grout for Tilt Slab panel construction
- Pipe Collars are installed by a Qualified Pest Manager who provides certification

Your Local Termortar Supplier

TERMORTAR Pty Ltd

NSW HEAD OFFICE

75 Lambton Road (P.O. Box 247), Broadmeadow NSW 2292

Telephone: (02) 4962 3526

Facsimile: (02) 4940 8400

International: (61-2) 4962 3526

Web: www.termortar.com.au